






SMART Board® 6000S (V3) Pro series with iQ

SBID-6265S-V3-P and SBID-6265S-V3-PW SBID-6275S-V3-P and SBID-6275S-V3-PW SBID-6286S-V3-P and SBID-6286S-V3-PW



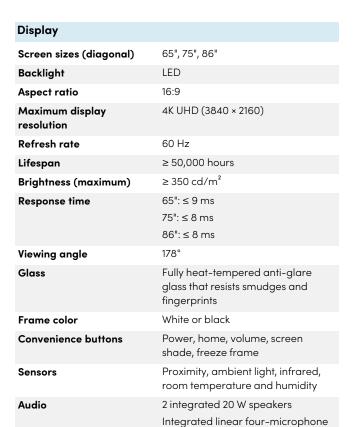

Integrated RFID NFC reader/writer



Interactive experience	
Touch technology	HyPr Touch™ with InGlass™
Touch features	Tool Explorer™
	Simultaneous Tool Differentiation
	Object Awareness™
	Pen ID™
	Silktouch™
	Pressure Sensitive Ink
Typical response time	9 ms
Frame rate	150 Hz
Accuracy	±1 mm
Minimum object size	2 mm
Multitouch capabilities	Up to 40 touch points (OS dependent)
Tools included	Pens (×2)
	Erasers (×2)
Tool holders	Intelligent, magnetic, frame-mounted
Optional tools	Multicolor four-pen bundle

smarttech.com smarttech.com/contact

NFC

© 2022 SMART Technologies ULC. All rights reserved. SMART Board, SMART Meeting Pro, SMART Ink, HyPr Touch, Tool Explorer, SMART TeamWorks, Object Awareness, Pen ID, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. February 2, 2022.

smarttech.com/kb/171782

Software	
iQ built-in Android™ experience	Included
SMART Meeting Pro® Room license	Included
SMART Meeting Pro Personal licenses (×10)	Included
SMART Ink® and SMART Product Drivers	Included
SMART Remote Management	Subscription for length of the included warranty

ience
Android version 9.0 (Automatic update to Android version 11 scheduled for the second half of 2022.)
6 GB DDR
32 GB
✓
✓
✓
SMART Whiteboard Customizable home screen Live input preview File and app libraries Google Drive™ and OneDrive™ access
✓
✓
✓
✓
Chinese (simplified), Chinese (traditional), Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish, Ukrainian, Vietnamese, Welsh

Automatic over-the-air (OTA)

Updates

PC computing	
OPS support	✓
OPS-C support	✓
PC module power supported OPS	60 W
Optional computing modules	SMART OPS PC with Windows 10 Pro SMART Chromebox

Inputs	Front	Back
OPS PC accessory slot (60 W devices)	-	1
HDMI® 2.1 with HDCP 1.4 and HDCP 2.3 support	1	2
VGA video	-	1
Stereo 3.5 mm	-	1
RS-232	-	1
RJ45	-	2
USB Type-C 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 2.0 (DFP) for peripherals; 65 W power delivery	1	-
USB Type-C, 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 65W power delivery	-	1
USB 2.0 Type-A	-	1
USB 3.0 Type-A	1	2
USB 3.0 Type-B	-	3
USB 2.0 Type-B	1	-

Outputs	Front	Back
HDMI 2.1	-	1
Stereo 3.5 mm	-	1
S/PDIF	_	1

Included cables and accessories	Qty
Country-specific power cable	1
USB cable	1
Pens (red and black)	2
Erasers	2
External dual-band 2.4 and 5 GHz antennae	3
Remote control	1
AAA batteries	2
WM-SBID-200 wall mount	1
SMART ID card (for NFC sign in)	2
Illustrated installation instructions	1
Important information document	1

smarttech.com/kb/171782

Connectivity	
Wired	RJ45 (×2) 1000baseT
Wi-Fi	IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO (both 2.4 and 5 GHz bands) supporting WEP, WPA, WPA2 PSK, and 802.1X EAP authentication protocols
Bluetooth	5.0 dual mode

Storage and operating requirements	
Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	5–35°C
Storage temperature	-20-60°C
Humidity	5–80% relative humidity, non-condensing

Power consumption	
Typical	65": 105 W
	75": 134 W
	86": 161 W
Standby	0.4 W

Certification and compliance*	
Regulatory models	IDS665-3, IDS675-3, and IDS686-3
US / Canada	UL, FCC, ISED, TSCA, CONEG Packaging, Proposition 65
EU / EEA / EFTA / UK	CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR®, HDMI

Purchasing information	
Order numbers	
SBID-6265S-V3-P	SMART Board 6065S-V3 Pro interactive display with iQ
SBID-6275S-V3-P	SMART Board 6075S-V3 Pro interactive display with iQ
SBID-6286S-V3-P	SMART Board 6086S-V3 Pro interactive display with iQ
SBID-6265S-V3-PW	SMART Board® 6065S-V3 Pro interactive display with iQ - White
SBID-6275S-V3-PW	SMART Board 6075S-V3 Pro interactive display with iQ - White
SBID-6286S-V3-PW	SMART Board 6086S-V3 Pro interactive display with iQ - White
TS-4PEN-MC	Tool Explorer multicolor 4-pen bundle (orange, purple, green, blue) with magnetic penwell
TW-SW-1	SMART TeamWorks™ Room perpetual software includes 1 year maintenance
TW-SW-3	SMART TeamWorks Room perpetual software includes 3 year maintenance
TW-SW-5	SMART TeamWorks Room perpetual software includes 5 year maintenance
Optional accessories	
	See smarttech.com/accessories
Warranty	
SMART Assure warranty	Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information

and visit $\underline{\text{smarttech.com/warranty}}$.

smarttech.com/kb/171782 3

^{*}Product availability may vary by region.

This product has received additional certifications not listed here.

Cable requirements	
НДМІ	Certified premium high speed HDMI (18 Gbps) Maximum length: 7 m
USB 2.0	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 5 m
USB 3.0	USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 3 m
USB Type-C	USB 3.2 Gen 1 certified SuperSpeed (5 Gbps) support Maximum length: 2 m
More information	See smarttech.com/kb/171414

smarttech.com/kb/171782 4


Installation, dimensions, and weights

Notes

- All dimensions ± 0.3 cm. All weights ± 0.9 kg.
- Product ships upright.
- Leave space around the display to ensure adequate ventilation. See the SMART Board 6000S and 6000S Pro installation and maintenance guide (smarttech.com/kb/171414) for the specific space requirements.

SBID-6265S-V3-P/SBID-6265S-V3-PW

Dimensions



Weight

51 kg

Shipping dimensions (including pallet)

170.4 cm × 118.1 cm × 26.4 cm

Shipping weight

72 kg

VESA mount


M8, 600 × 400 mm

Handles

2

SBID-6275S-V3-P/SBID-6275S-V3-PW

Dimensions



Weight

65 kg

Shipping dimensions (including pallet)

193.1 cm × 130.8 cm × 26.4 cm

Shipping weight

88 kg

VESA mount


M8, 600 × 400 mm

Handles

2

SBID-6286S-V3-P/SBID-6286S-V3-PW

Dimensions

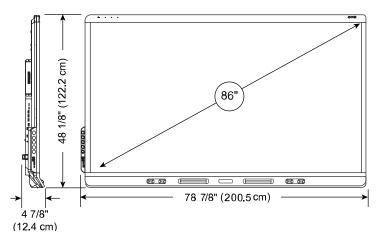

Weight

84 kg

Shipping dimensions (including pallet)

218.6 cm × 144.7 cm × 26.4 cm

Shipping weight

110 kg

VESA mount

M8, 600 × 400 mm

Handles

2

smarttech.com/kb/171782 5